

RAVEN-EYE®

New Generation Open Channel Non-Contact Radar Flow Meter



The RAVEN-EYE® ATEX is the newest non-contact RADAR area/velocity flow meter for open channel flow measurements from Flow-Tronic. The new sensor combines advanced digital Doppler radar velocity sensing technology with most modern and powerful DSP processor technology allowing a patent pending self-learning average velocity calculation. The need for empirical models or time consuming site calibration become obsolete.

Use the RAVEN-EYE® ATEX in combination with the RTQ-2000 flow logger for portable monitoring and for permanent monitoring with the IFQ MONITOR which display flow rate, velocity, level and more.

The RAVEN-EYE® ATEX provides the user with highly accurate flow measurements under a wide range of flow and site conditions. By measuring the velocity of the fluid above the water surface, the RAVEN-EYE® eliminates accuracy and reliability problems inherent with submerged sensors, including sensor disturbances and sensor fouling.

The RAVEN-EYE® ATEX is ideal for monitoring flows from corrosive liquids or with high solids content.



FLOW-TRONIC

www.flow-tronic.com

Technical Specifications

The RAVEN-EYE® ATEX is a universal non-contact level/velocity flow sensor that can be connected to the RTQ-2000 or the IFQ MONITOR. The use of a barrier box between the IFQ MONITOR and the RAVEN-EYE® ATEX is mandatory to comply with electrical parameters.

Velocity Measurement

Method	Radar
Range	$\pm 0,15$ to ± 9 m/s (0.49 to ± 29.53 ft/s) (bi-directional)
Accuracy	$\pm 0,5\%$, + zero stability
Zero Stability	$\pm 0,02$ m/s (± 0.06 ft/s)
Resolution	0,001 m/s (0.003 ft/s)

Optional Combined Level Measurement (Radar)

Method	Radar
Range	0,01 to 15 m (0.03 to 49.21 ft)
Accuracy	± 2 mm (0.08'') of reading
Resolution	1 mm (0.04'')
Mounting	Separate
Approval	CE, ATEX (II 1G, 1/2G, 2G Ex ia IIC T6 Ga, Ga/Gb, Gb) – barrier box needed

Optional Separate Level Measurement

Method:	Any 4-20 mA loop powered sensor fulfilling the necessary ATEX requirements
---------	--

Flow Measurement

Method	Conversion from surface velocity measurement to average velocity based on patent pending self-learning model using velocity distribution measurements.
--------	--

Conversion of water level and pipe size to fluid area. Multiplication of fluid area by average velocity to obtain the flow rate.

Conversion Accuracy	$\pm 5\%$ of reading Assumes pipe is 0 to 90% full
---------------------	---

Communication

RS-485 communications port with Modbus ASCII slave communication protocol


Power Supply

Supplied by IFQ MONITOR for ATEX sensors via ATEX barrier or RTQ-2000

Safety parameters

Power supply	RS485	
$U_i = 8,7$ V	$U_i = 8,7$ V	$U_o = 5,88$ V
$I_i = 0,73$ A	$I_i = 0,73$ A	$I_o = 0,24$ A
$P_i = 1,6$ W	$P_i = 1,6$ W	$P_o = 35,21$ mW
$C_i = 10,6$ μ F	$C_i = 0$ μ F	$C_o = 24, 5$ μ F
$L_i = 4,7$ μ H	$L_i = 0$ μ H	$L_o = 30$ μ H
		$L_o/R_o = 3,99$ μ H/Ohm

Technical Specifications

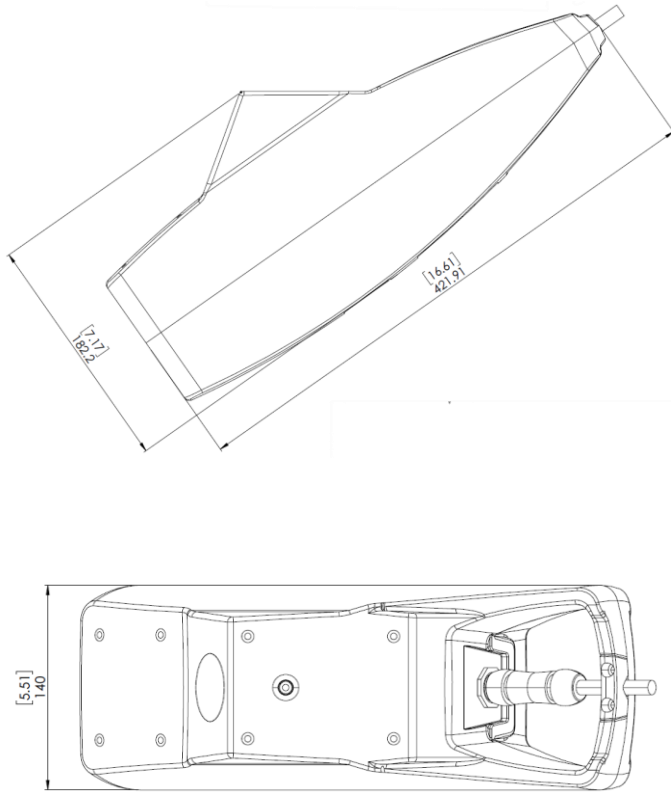

Internal Temperature Measurement

Method Digital sensor
Range -40° to +80° C (-40° to +176°F)

Internal Humidity Measurement

Method Digital sensor
Range 0 to 100 %

Internal Pressure Measurement

Method Digital sensor
Range 0 to 1500 HPa

Material & Dimensions

Enclosure Polyurethane (PU), PU ESD-dissipative paint
Dimensions 422 mm L, 140 mm W, 183 mm H
(16.61" L, 5.51" W, 7.21" H)
Weight 3,85 Kg (8.49 lbs) (without the cable, level sensor and mounting accessories)
Protection rate IP68

Environmental Conditions

Operating temperature range -20° to 50° C (-4° to +122° F)
Storage temperature range -30° to 60° C (-22° to +140° F)

Certifications

CE

ATEX ATEX Directive 94/9/EC
EN60079-0 : 2012 + A11 : 2013 (CEI 60079-0 : 2011)
EN60079-11 : 2012 (CEI 60079-11 : 2011)

Marking:  II 2 G Ex ib IIB T4 Gb

Sensor Cable

Material Polyurethane jacketed
Length Standard: 10 m (32.81 ft)
Optional lengths on request

*Specifications are subject to change without notice
Updated: February 2022*



FLOW-TRONIC

www.flow-tronic.com

Chemin des Tilleuls 32 | 4840 Welkenraedt | BELGIUM
Tel.: +32 (0)87 899 799 | E-mail: info@flow-tronic.com