



## Contents

- Aqua TROLL 700/800 Wiper Plug
- Vacuum Grease

## Installing Wiper Plug

### 1 Remove existing wiper or wiper plug.




Remove restrictor from the instrument.



Loosen the set screw at the base of each sensor.



Slide each sensor out of the instrument.

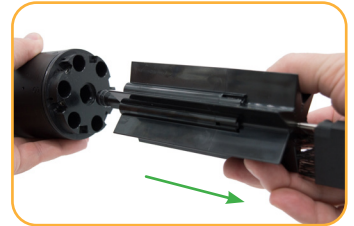


Remove wiper by pulling it straight out of the instrument.

### 2 Install new wiper plug.



Apply a pea-sized drop of grease to the wiper plug O-rings

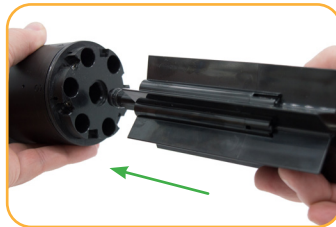

Align wiper plug shaft and insert wiper plug into center port.



Insert sensors. Sensor tongue must slide into groove on the wiper plug.



Tighten set screws on all sensors.



Install restrictor on the instrument.